


Клеммы тип "О" изолированные

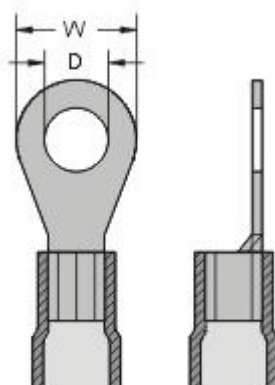

Размеры в таблице указаны в мм

Наименование	Размер отверст. D	Ширина W	Сечение кабеля	
			AWG	mm ²
TRI-1.25-3S	3.2	5.5	22-16	0.5-1.5
TRI-1.25-3	3.7	5.5	22-16	0.5-1.5
TRI-1.25-4	4.3	8.0	22-16	0.5-1.5
TRI-1.25-5	5.3	8.0	22-16	0.5-1.5
TRI-1.25-6	6.4	11.7	22-16	0.5-1.5
TRI-1.25-8	8.4	11.7	22-16	0.5-1.5
TRI-1.25-10	10.5	13.7	22-16	0.5-1.5
TRI-2-3	3.7	6.5	16-14	1.5-2.5
TRI-2-4	4.3	8.5	16-14	1.5-2.5
TRI-2-5	5.3	9.5	16-14	1.5-2.5
TRI-2-6	6.4	12.0	16-14	1.5-2.5
TRI-2-8	8.4	12.0	16-14	1.5-2.5
TRI-2-10	10.5	13.7	16-14	1.5-2.5
TRI-3.5-4	4.3	8.0	14-12	2.5-4.0
TRI-3.5-5	5.3	8.0	14-12	2.5-4.0
TRI-3.5-6	6.4	12.0	14-12	2.5-4.0
TRI-5.5-4	4.3	9.5	12-10	4.0-6.0
TRI-5.5-5	5.3	9.5	12-10	4.0-6.0
TRI-5.5-6	6.4	12.0	12-10	4.0-6.0
TRI-5.5-8	8.4	15.0	12-10	4.0-6.0
TRI-5.5-10	10.5	15.0	12-10	4.0-6.0